

Living Surfaces[™] Liquid Lava[™]


Living Surfaces Liquid Lava products are exciting new materials consisting of liquid sealed within the panels. The panels are resilient and when pressure is applied, the liquid literally moves and swirls around one's feet or hands. Playful images of color and light create a sensation and atmosphere unlike any other flooring product before.

Choose from a wide range of colors and color combinations from pastel shades to the brightest reds and yellows. Custom colors and shapes are available upon request.

Living Surfaces Liquid Lava products are suitable for any application including: nightclubs, restaurants, children's hospitals, casinos, trade show exhibits, museums, hospitals, nautical vessels, dance floors, and more.

The liquid within Living Surface Liquid Lava products is non-toxic. The top surface is resilient and resists impact. Living Surfaces Liquid Lava are patented products. Tiles can be recycled.

Tables & Countertops

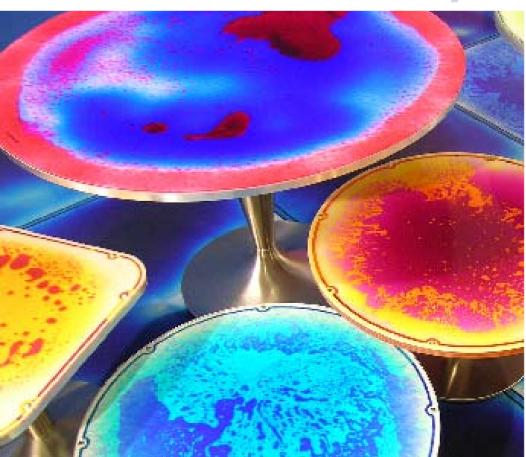













SKETCH

Technical Information:

The liquid within our Living Surface[™] Liquid Lava[™] products are non-toxic. Living Surfaces[™] Liquid Lava[™] are patented products.

Thickness: 1.18" (3cm) diameter

Top Surfaces: We offer three (3) different surfaces in our Table/Counter Tops: Matte, Glossy, Coarse

Styles: We offer three (3) different styles of table tops: Points, Line, Free Line

| 23.6" dia. (80cm) | 31.49" dia. (100cm) | 23.6" x 23.6" | 23.6" x 23.6" (80cm x 80cm) | 31.49" x 31.49" | (80cm x 80cm) | (80cm x 80cm) | Custom shapes—please send your requirements for our review.









Installation Instructions:

The table tops arrive to you pre-drilled to accept standard hardware. You can simply lay the table top on the ground (on a protective blanket so you do not scratch the surface) and attach the base to the back of the table top.

Storage:

Attention should be paid to the environmental conditions which occur during installation and/or storage. The tiles MUST be kept in a horizontal position during storage.

The Living Surface Liquid Lava tiles resist temperatures up to 140° F (60° C), however the best results are obtained at room temperatures between 50° F (10° C) and 104° F (40° C). The tiles react normally at lower temperatures as well but are more sensible to damage and colder temperatures.

Maintenance:

To obtain best results, periodically use an auto polishing metallic wax. This should be applied ONLY with a towel directly to the surface. (The tiles can be cleaned as well using common detergents found within the home as well.) Do NOT use automatic cleaning machinery and polishing wheels on the tiles. The rate of which the tiles should be cleaned depends on the amount of traffic that may occur for each installation.

Cleaning advice:

Please visit our web site for full cleaning instructions: http://www.jockimo.com/prod-livingfloor-technical.html

Colors:

Numerous standard colors are available in our Living Surfaces "Sketch" series. Custom colors are available upon request. (Pantone colors are the best when specifying custom colors.)

Our new TransLava Table/Countertops have a transparent background allowing for under lighting to create an amazingly dramatic affect.

Jockimo, Inc.

20101 SW Birch, Suite #276 Newport Beach, CA 92660

Phone: 949.251.1560 Fax: 949.251.0126

www.Jockimo.com